

Advanced Dewatering Device

The Reflex Suction Strainer is designed to work in harsh, heavy duty, high traffic environments and provide contaminant reduced, long lasting, fast and reliable fluid transfer.

Key Features:

Improved productivity through:

- > Reduced system downtime
- > Longer lasting
- > Fewer pump blockages
- > Decreased pump dry suction time
- > Less manual handling
- > Easy cleaning
- > Fast attachment and replacement
- > No additional fittings required
- > No need to bore drainage holes

Improved safety through:


- > No sharp edges
- > Reduced trip hazards
- > No metal parts
- > Lightweight
- > Hi Vis colour



REFLEX Strainer

| | |
|-------------------|--|
| Flow rate | 850 litres per minute |
| Filtration flow | Statistics 12 times surface area to suction aperture |
| Elongation | Safe capability 450% |
| Length | 370mm |
| Width | 63mm |
| Weight | approx. 450g |
| Hardness | 65 shore A |
| Temperature range | Safe -66c to 100+c |
| Colour | Yellow (other colours on request) |
| Size | 2" standard other sizes available on request. |


- Vulcanized elastomeric compound(SBR)
- Manufactured in accordance to ISO9000
- Supports in excess of 100 tonnes of downward pressure
- Petrochemical resistant
- No sharp edges
- No metal parts
- No corrosion

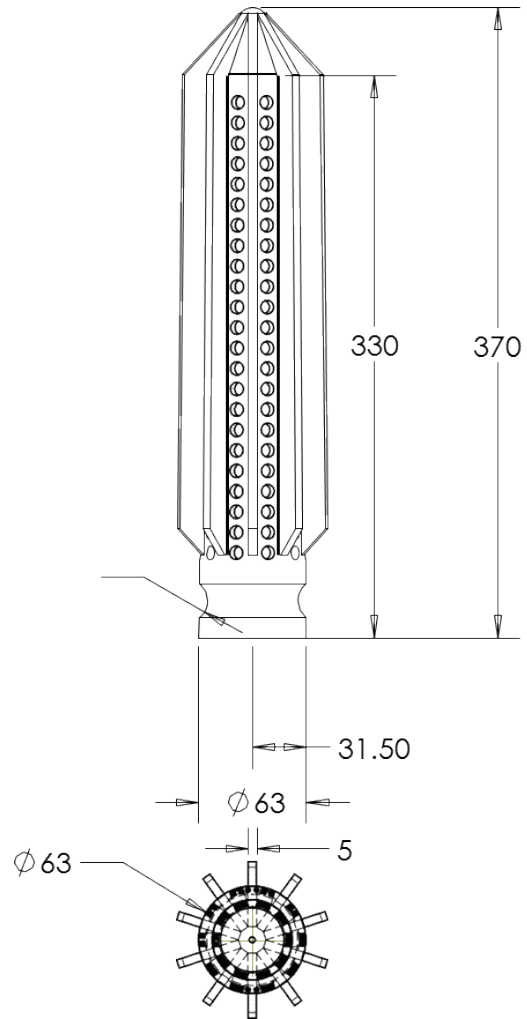

Fast attachment / detachment to Camlock fitting.



Reflex adapter is chemically bonded to the strainer. Just slide the hose over the male end. No hose clamps needed.

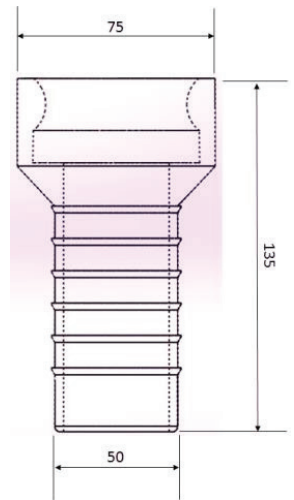

MEGATOR
Global Leader in Pumps and Pollution Control Solutions

ISO 9001:2008
CERTIFIED QMS